


# ASAP FASTENING SYSTEMS, INC.

## SUPPLIES FOR INDUSTRY AND CONSTRUCTION

2013 SOUTH 37TH STREET • MILWAUKEE, WISCONSIN 53215

(414) 344-4500 • FAX (414) 344-4504

WWW.ASAPFASTENING.COM • EMAIL: SALES@ASAPFASTENING.COM

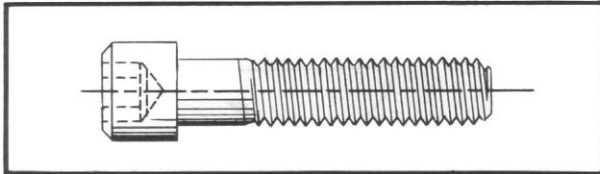

### SOCKET HEAD CAP SCREWS

**Materials:** Alloy Steel  
Stainless Steel

**Threading:** UNC - Coarse  
UNF - Fine

**Finishes:** Plain  
Plated

Diameter	Length	Pkg. Qty.	Wt. Per 100 Pcs
<b>#0</b> —80 NF Key size .050	1/8	100	.1
	3/16	100	.1
	1/4	100	.1
	3/8	100	.1
	1/2	100	.1
<b>#1</b> —72 NF Key size 1/16	1/8	100	.1
	3/16	100	.1
	1/4	100	.1
	3/8	100	.1
	1/2	100	.1
<b>#2</b> —56 NC Key size 5/64	3/16	100	.1
	1/4	100	.1
	3/8	100	.1
	1/2	100	.2
	5/8	100	.2
	3/4	100	.3
	7/8	100	.3
	1	100	.4
	<b>#3</b> —48 NC —56 NF Key size 5/64	3/16	100
1/4		100	.1
3/8		100	.1
1/2		100	.2
5/8		100	.2
3/4		100	.3
7/8		100	.3
1		100	.4
<b>#4</b> —40 NC —48 NF Key size 3/32	1/4	100	.1
	3/8	100	.1
	1/2	100	.2
	5/8	100	.2
	3/4	100	.3
	7/8	100	.3
	1	100	.4
	1-1/4	100	.4
	1-1/2	100	.4
	1-3/4	100	.5
	2	100	.5


Diameter	Length	Pkg. Qty.	Wt. Per 100 Pcs
<b>#5</b> —40 NC —44 NF Key size 3/32	1/4	100	.2
	3/8	100	.3
	1/2	100	.3
	5/8	100	.3
	7/8	100	.4
	1	100	.4
	1-1/4	100	.4
	1-1/2	100	.5
<b>#6</b> —32 NC —40 NF Key size 7/64	1-3/4	100	.5
	2	100	.5
	2-1/4	100	.6
	2-1/2	100	.6
	1/4	100	.3
	3/8	100	.3
	1/2	100	.4
	5/8	100	.4
	3/4	100	.4
	7/8	100	.5
<b>#8</b> —32 NC —36 NF Key Size 9/64	1	100	.5
	1-1/4	100	.6
	1-1/2	100	.7
	1-3/4	100	.7
	2	100	.7
	2-1/4	100	.8
	2-1/2	100	.8
	1/4	100	.4
	3/8	100	.5
	1/2	100	.5
	5/8	100	.6
3/4	100	.6	
7/8	100	.7	
1	100	.7	
1-1/4	100	.8	
1-1/2	100	.9	
1-3/4	100	1.1	
2	100	1.3	
2-1/4	100	1.5	
2-1/2	100	1.8	
		100	2.0

# SOCKET HD CAP SCREWS

**Materials:** Alloy Steel  
Stainless Steel

**Threading:** UNC - Coarse  
UNF - Fine


**Finishes:** Plain  
Plated

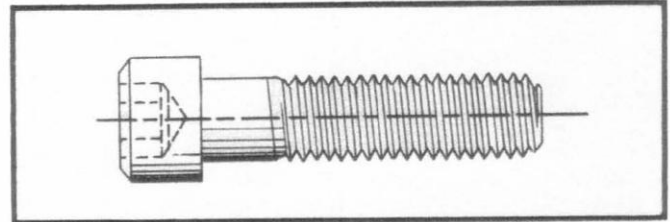

Diameter	Length	Pkg. Qty.	Wt. Per 100 Pcs	
<b>#10</b>	3/8	100	.6	
	1/2	100	.7	
	5/8	100	.8	
	3/4	100	.9	
	7/8	100	.9	
	1	100	1.0	
	1-1/4	100	1.3	
	1-1/2	100	1.4	
	1-3/4	100	1.6	
	2	100	1.9	
	2-1/4	100		
	2-1/2	100		
	2-3/4	100		
	3	100		
-24 NC	3	100		
-32 NF	3-1/4	100		
Key size 5/32	3-1/2	100		
	4	100		
<b>1/4</b>	3/8	100	.8	
	1/2	100	1.2	
	5/8	100	1.4	
	3/4	100	1.5	
	7/8	100	1.6	
	1	100	1.8	
	1-1/4	100	2.1	
	1-1/2	100	2.5	
	1-3/4	100	2.8	
	2	100	3.0	
	2-1/4	100	3.4	
	2-1/2	100	3.8	
	2-3/4	100	3.9	
	3	100	4.3	
	3-1/2	50	4.9	
	4	50		
	-20 NC	4-1/2	50	
	-28 NF	5	50	
Key size 3-16	5-1/2	50		
	6	50		

Diameter	Length	Pkg. Qty.	Wt. Per 100 Pcs
<b>5/16</b>	3/8	100	1.8
	1/2	100	2.0
	5/8	100	2.3
	3/4	100	2.5
	7/8	100	2.7
	1	100	2.9
	1-1/4	100	3.4
	1-1/2	100	3.9
	1-3/4	100	4.4
	2	100	4.9
	2-1/4	100	5.4
	2-1/2	100	5.9
	2-3/4	100	6.4
	3	100	6.9
-18 NC	3-1/2	100	8.4
-24 NF	4	50	
Key size 1/4	4-1/2	50	
	5	50	
	5-1/2	50	
	6	50	
<b>3/8</b>	1/2	100	3.4
	5/8	100	3.8
	3/4	100	4.0
	7/8	100	4.3
	1	100	4.6
	1-1/4	100	5.2
	1-1/2	100	6.0
	1-3/4	100	6.6
	2	100	7.8
	2-1/4	100	8.6
	2-1/2	50	9.0
	2-3/4	50	9.8
	3	50	10.2
	3-1/2	50	11.6
4	50	13.2	
-16 NC	4-1/2	50	14.8
-24 NF	5	50	19.6
Key size 5/16	5-1/2	50	
	6	50	
	7		
	8		

# SOCKET HD CAP SCREWS

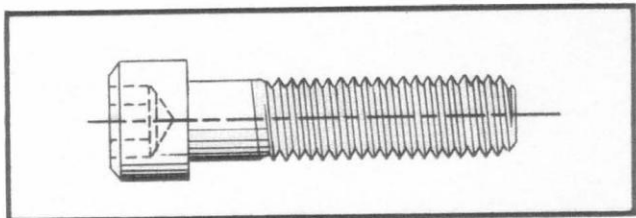

**Materials:** Alloy Steel  
Stainless Steel

**Threading:** UNC - Coarse  
UNF - Fine

**Finishes:** Plain  
Plated

Diameter	Length	Pkg. Qty.	Wt. Per 100 Pcs
<b>7/16</b>	1/2	100	4.9
	5/8	100	5.2
	3/4	100	5.6
	7/8	100	6.0
	1	100	6.4
	1-1/4	100	7.6
	1-1/2	100	8.4
	1-3/4	100	9.2
	2	50	10.0
	2-1/4	50	11.0
	2-1/2	50	12.0
	2-3/4	50	13.2
	3	50	14.0
	3-1/4	50	15.2
3-1/2	50	16.0	
4	50	18.0	
-14 NC -20 NF Key size 3/8			
<b>1/2</b>	1/2	100	7.4
	5/8	100	8.0
	3/4	100	8.4
	7/8	100	9.0
	1	100	9.6
	1-1/4	100	10.6
	1-1/2	100	12.6
	1-3/4	50	13.2
	2	50	14.8
	2-1/4	50	16.0
	2-1/2	50	17.6
	2-3/4	50	18.4
	3	50	19.6
	3-1/4	25	20.4
	3-1/2	25	24.0
	4	25	25.2
	4-1/2	25	28.0
	5	25	31.6
	5-1/2	25	34.4
	6	25	37.2
6-1/2	25	39.2	
7	25	41.6	
8	25	50.0	
9	25		
10	25		
-13 NC -20 NF Key size 3/8			


Diameter	Length	Pkg. Qty.	Wt. Per 100 Pcs
<b>5/8</b>	1	50	17.2
	1-1/4	50	19.2
	1-1/2	50	21.2
	1-3/4	50	22.4
	2	50	24.0
	2-1/4	25	27.2
	2-1/2	25	29.2
	2-3/4	25	31.2
	3	25	33.6
	3-1/4	25	36.0
	3-1/2	25	38.0
	4	25	42.0
	4-1/2	25	45.6
	5	25	49.6
5-1/2	25	53.6	
6	25	57.2	
6-1/2	25	61.2	
7	25	69.2	
8	25	72.4	
9	25		
10	25		
-11 NC -18 NF Key size 1/2			
<b>3/4</b>	1-1/4	25	28.4
	1-1/2	25	30.4
	1-3/4	25	33.6
	2	25	36.4
	2-1/4	25	39.6
	2-1/2	25	42.4
	2-3/4	25	45.6
	3	25	49.2
	3-1/4	25	52.0
	3-1/2	25	55.2
	4	25	61.6
	4-1/2	25	68.0
5	25	70.4	
5-1/2	25	78.4	
6	25	84.0	
6-1/2	25	90.4	
7	25	96.0	
8	25	107.2	
9	25		
10	25		
12	25		
-10 NC -16 NF Key size 5/8			

# SOCKET HEAD CAP SCREWS

**Materials:** Alloy Steel  
Stainless Steel

**Threading:** UNC - Coarse  
UNF - Fine

**Finishes:** Plain  
Plated

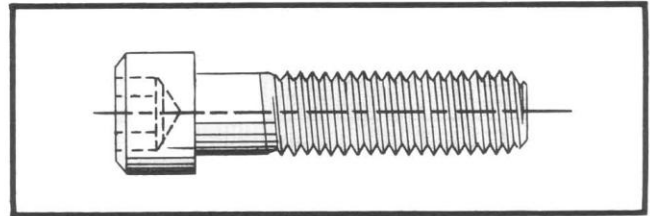

Diameter	Length	Pkg. Qty.	Wt. Per 100 Pcs
<b>7/8</b>	2	10	51.2
	2-1/4	10	54.0
	2-1/2	10	58.0
	2-3/4	10	62.4
	3	10	66.4
	3-1/4	10	71.2
	3-1/2	10	76.0
	4	10	84.0
	4-1/2	10	92.0
	5	10	100.4
	5-1/2	10	108.0
	6	10	115.6
	6-1/2	10	122.4
7	10	130.4	
8	10	136.0	
9	10		
10	10		
—9 NC —14 NF Key size 3/4			
<b>1</b>	2	10	71.2
	2-1/4	10	76.0
	2-1/2	10	81.2
	2-3/4	10	85.2
	3	10	92.0
	3-1/4	10	97.2
	3-1/2	10	102.8
	4	10	113.2
	4-1/2	10	124.0
	5	10	134.4
	5-1/2	10	146.0
	6	10	158.0
	6-1/2	10	168.0
	7	10	178.4
	8	10	198.0
	9	10	
	10	10	
—8 NC —14 NF Key size 3/4			

Diameter	Length	Pkg. Qty.	Wt. Per Piece
<b>1-1/4</b>	2-1/2	1	1.5
	3	1	1.6
	3-1/2	1	1.8
	4	1	2.0
	4-1/2	1	2.1
	5	1	2.3
	5-1/2	1	2.4
	6	1	2.6
	6-1/2	1	2.8
	7	1	2.9
	8	1	3.3
	9	1	3.6
10	1	3.9	
12	1	4.5	
—7 NC Key size 7/8			
<b>1-1/2</b>	3	1	2.4
	3-1/2	1	2.5
	4	1	2.9
	4-1/2	1	3.0
	5	1	3.3
	5-1/2	1	3.5
	6	1	3.8
	6-1/2	1	4.0
	7	1	4.3
	8	1	4.8
	9	1	5.2
	10	1	5.6
12	1	6.5	
—6 NC Key size 1			

Socket Head Alloy Steel Cap Screws available in longer lengths and through 3" diameter as semi-standards.