

ASAP FASTENING SYSTEMS, INC.

SUPPLIES FOR INDUSTRY AND CONSTRUCTION

2013 SOUTH 37TH STREET • MILWAUKEE, WISCONSIN 53215

(414) 344-4500 • FAX (414) 344-4504

WWW.ASAPFASTENING.COM • EMAIL: SALES@ASAPFASTENING.COM





HA11-1624



MODEL

HA11-1624

HA11-1624

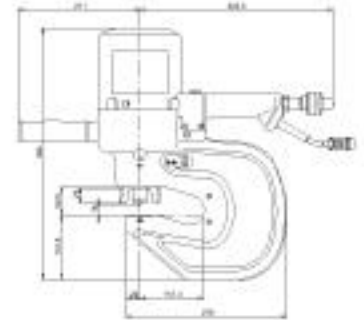

Specifications

Model		HA11-1624
Max. Throat Depth	inch (mm)	4-5/16" (110)
Punching Capacity (for Mild Steel)	Max. Punching Diameter	15/16" (24)
	Max. Punching Thickness	5/8" (16)
Hole Making Time	sec	Punching Time 16.5
Allowable Max. pressure	psi (kg/cm ²)	10,000 psi (700)
Max. Output	lbf (tf)	97,020 (49)
Ram Stroke	inch (mm)	1" (25)
Mass (Weight)	lbs (kg)	78 (35.5)

Standard Accessories for HA11-1624

- Hose cord assembly
- Spanner wrench
- 22 mm "D" series punch & die
- 4 mm Allen wrench
- Sub handle assembly
- Tool box