


ASAP FASTENING SYSTEMS, INC.

SUPPLIES FOR INDUSTRY AND CONSTRUCTION


2013 SOUTH 37TH STREET • MILWAUKEE, WISCONSIN 53215

(414) 344-4500 • FAX (414) 344-4504

WWW.ASAFASTENING.COM • EMAIL: SALES@ASAPFASTENING.COM

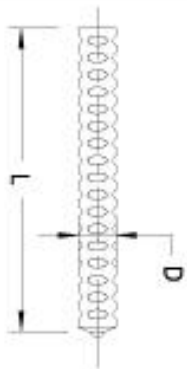

BEFORE WELD

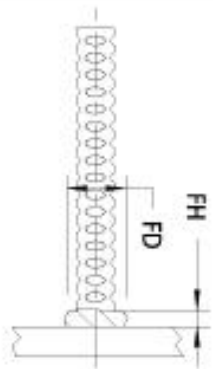

AFTER WELD

TYPE **DB** STUD
(DEFORMED BAR ANCHOR)
NO THREAD - FULL WELD BASE
TYPE **F** FERRULE SUPPLIED

(NOTE #3)

D		L ^{*1}	STUD PART NUMBER ^{*2}	FD	FH	CHUCK PART NUMBER	LIGHT DUTY SPLIT		STANDARD COMBINATION ^{*4}
DIAMETER		MIN. LENGTH BEFORE WELD		WELD FILLET DIAMETER	WELD FILLET HEIGHT		FOOT PART NUMBER	GRIP PART NUMBER	FOOT AND GRIP
3/8		10-1/8	1211-06-162	1/2	1/8	5019	11124	8052	8125
1/2		12-1/8	1211-08-194	11/16	5/32	8027	11125	8053	8125
5/8		12-3/16	1211-10-195	7/8	3/16	8028	11125	8054	8127
3/4		12-3/16	1211-12-195	1-1/16	1/4	8029	11125	8054	8127

1.)  STUDS ARE AVAILABLE IN ANY REQUIRED LENGTH ABOVE THE STANDARD MINIMUM UP TO 48".

2.) SEE PART NUMBER CONSTRUCTION DATA ON PAGE NO.3

3.) LISTED FERRULE IS FOR STANDARD FLAT DOWN HAND POSITION. SEE PAGE NO.5 FOR LISTING OF FERRULES USED IN OTHER APPLICATIONS.

4.) REQUIRES USE OF P/N-11101 DUAL LEG ADAPTOR.